




Seit 1872

# STACKE

S I C H E R H E I T M I T S Y S T E M

## **Euroline safes Compact Class**

Maximum security using minimum space

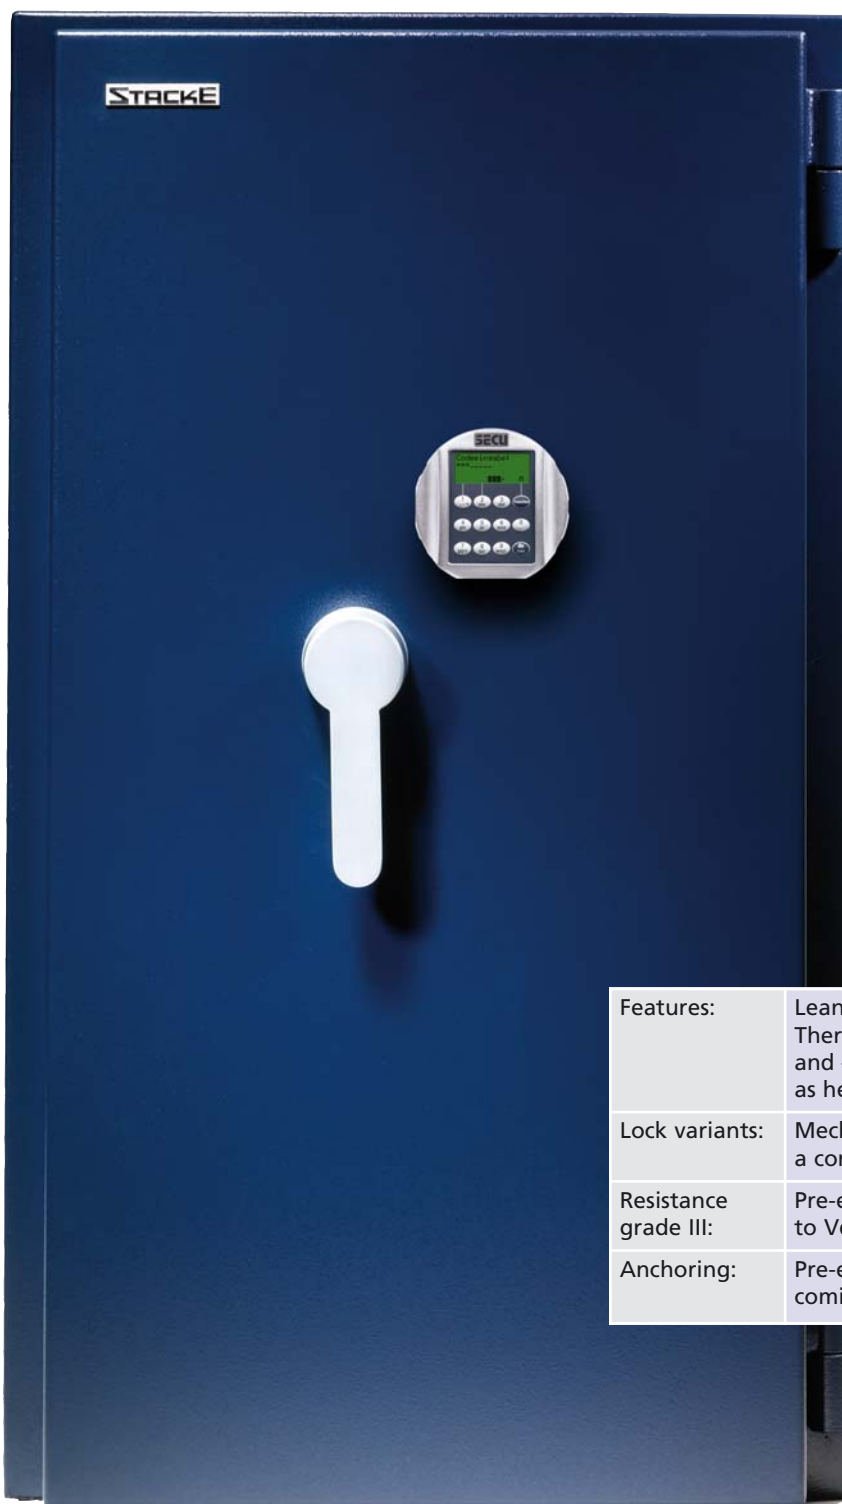

VdS-tested and certified according to the European Standard EN 1143-1, ECB-S-Euro-certified according to EN 1143-1, resistance grades II and III

Features:	Lean walls – only 50 mm thick. Therefore, optimum useful space and – as light-weight as possible, as heavy as necessary.
Lock variants:	Mechanical/electronic and a combination of both.
Resistance grade III:	Pre-equipped for an IAS according to VdS.
Anchoring:	Pre-equipped for anchoring, coming with dowels.

Made in Germany, highly-qualified skilled work in production and service.

**Modell EL 50/80.140 C  
ECS HS**  
ECS Selo B, Class 2 (B),  
as main lock, special colour



# Euroline safes Compact Class

Resistance grades II und III



**Lean walls**, only 50 mm thick, thanks to the use and most skilful processing of high-quality materials. The result: Optimum useful space using minimum space.


**The optimum weight**, again reduced by 25%. But don't worry: The Compact Class is as light-weight as possible, but as heavy as necessary. Coming as standard: The equipment for floor anchoring. The weight and the equipment satisfy all requirements of the property insurers.

**Leaner and lighter**, but not at the cost of security. Therefore, we can justifiably say: „Where others have to pass on, we provide security that really fits.“ No installation and transport problems due to the weight or dimensions. For discrete installation in wall to wall units and with maximum security of the respective resistance class being guaranteed.

**Guaranteed quality** through supervised processing. Stacke is a production plant that is TÜV-tested according to DIN EN ISO 9001:2000. The quality management comprises the company's own development, production and service operations. In addition, production is inspected by an external body, i.e. the IBMB, Braunschweig, several times per year.

**Additionally** guaranteed: Made in Germany, at Aachen, exclusively by highly-qualified skilled staff in production and service.

## Locking variants

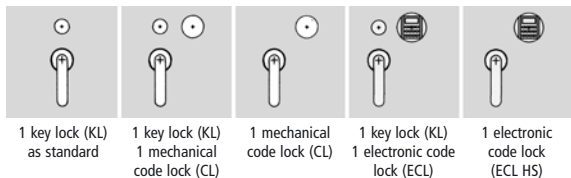

## Insurance conditions

Resistance grade II	Insurance*, business use up to EUR 50,000, private use up to EUR 100,000
Resistance grade III	Insurance*, business use up to EUR 100,000, private use up to EUR 200,000

\* The specifications regarding insurance conditions are not binding and represent the latest state of information.

Depending on the resistance grade, the locks satisfy Lock Class 1 or 2 acc. to the VdS requirements.

## Model variants

	EL 50.85	EL 50.110 C EL 80.110 C	EL 50.140 C EL 80.140 C	EL 50.230 C EL 80.230 C
Resistance grade II				
Resistance grade III				
Outside dimensions in mm Height x width x depth	625 x 550 x 530	800 x 550 x 530	975 x 550 x 530	1150 x 650 x 580
Inside dimensions in mm Height x width x depth	525 x 450 x 350	700 x 450 x 350	875 x 450 x 350	1050 x 550 x 400
Weight approx. kg	300	364	410	600
		372	425	610
Volume in litres approx.	85	110	140	230
Adjustable shelf divider	1	1	2	2
Lockable inside compartment, height 200 mm, clear height 160 mm	1 on request at extra cost	1 on request at extra cost	1 on request at extra cost	1 on request at extra cost

For the fittings, 40 mm must be added to the outside depth. Safes of resistance grade III, model series EL 80... C are pre-equipped for connection to an intruder alarm system (IAS).

Stacke GmbH  
Jülicher Str. 390/392 · D-52070 Aachen  
Telephone 0049 (0)241 16808-0  
Telefax 0049 (0)241 16808-30  
info@stacke-safe.de · www.stacke-safe.de

# STACKE